



N-Z90 W Pro

MAXIMISING USERS TO LIMIT









WiFi





GPRS

(Optional



Access Control

Multi-Bio Attendance and Access Control

4

Battery

(Optional

Storage Capacity


Finger

Face Capacity	2000
Finger Capacity	10,000
Card Capacity	10,000
Max User	10,000
Password	10,000
Log Capacity	1,50,000

Features

- High-Speed and Accurate Fingerprint Identification
- Face, Finger, Card, Password authentication
- output relay for door open.
- Good adaptation for dry, moist and rough fingerprints.
- Supremely low Electric energy consumption.
- Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.



N-Z90 W Pro

"N – Z90W Pro the model for the companies with large number of Users. All the features packed in this sleek & dynamic model."


N-Z90W Pro

Commun	ication	Interf	ace
0011110			

Communication	WiFi, TCP/IP, RS232/485, USB

Biometric

Push Data	Yes
GPRS	Yes (Optional)
Printer	Yes (Optional)
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Processor	1GHz
Verification time	<=1 second
RF card options	125kHz EM (Standard) /
	13.56MHz Mifare (Optional)

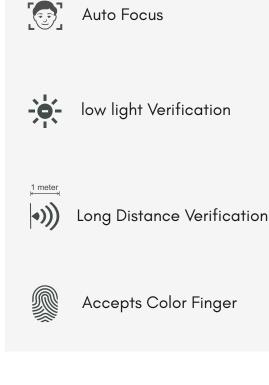

Audio/Visual

LCD	3" TFT Color Screen 480x272 pixel
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English


Access control

Wiegand input/output	YES
Relay	YES
Support Exit Reader	Wiegand Reader, RS485 Reader
	Push Button, Remote, No Touch

Power & Enviroment

Battery	Yes (Optional)
Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension	188 x 65 x 150 mm

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.





Time Attendance



Access Control



Employee Self Service



Mobile App

Connect with us on

ſ	BiomaxOfficial	۲	BioMax Security
0	biomaxsecurity	in	BioMax Access Contro

