



N-Bio101 W Advance Multi Bio





Finger



RFID













race

Battery WiFi (Optional)

LAN

(Optional)

Control

Multi-Bio Attendance and Access Control

Storage Capacity

Face Capacity	2000
Finger Capacity	5000
Card Capacity	2000
Max User	2000
Log Capacity	1,50,000

Features

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.

Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.




Communication Interface

WIFI, TCP/IP, RS232/485, USB Communication

Biometric

Push Data	YES
4G GPRS	Optional
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
Processor	1 GHz
OS	Linux
Verification time	<=1 second
RF card options	125kHz EM (Standard) /
	13.56MHz Mifare (Optional)

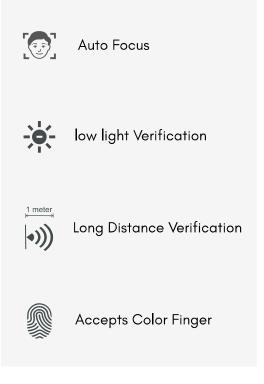

Audio/Visual

LCD	2.8" TFT color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Software Desktop, Web, Cloud

Access control

Wiegand in & out	YES
Relay	YES
Support	RS485 Reader, Wiegand Reader,
	Remote Push Button, No Touch



Time Attendance



Access Control



Employee Self Service



Mobile App

Power & Environment

Battery	Yes (Optional)
Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension	175 x 145 x 79.5mm

Disclaimer: Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Connect with us on









